


PSCQUICK

Porta scorrevole_Sliding door **H 2000 mm**

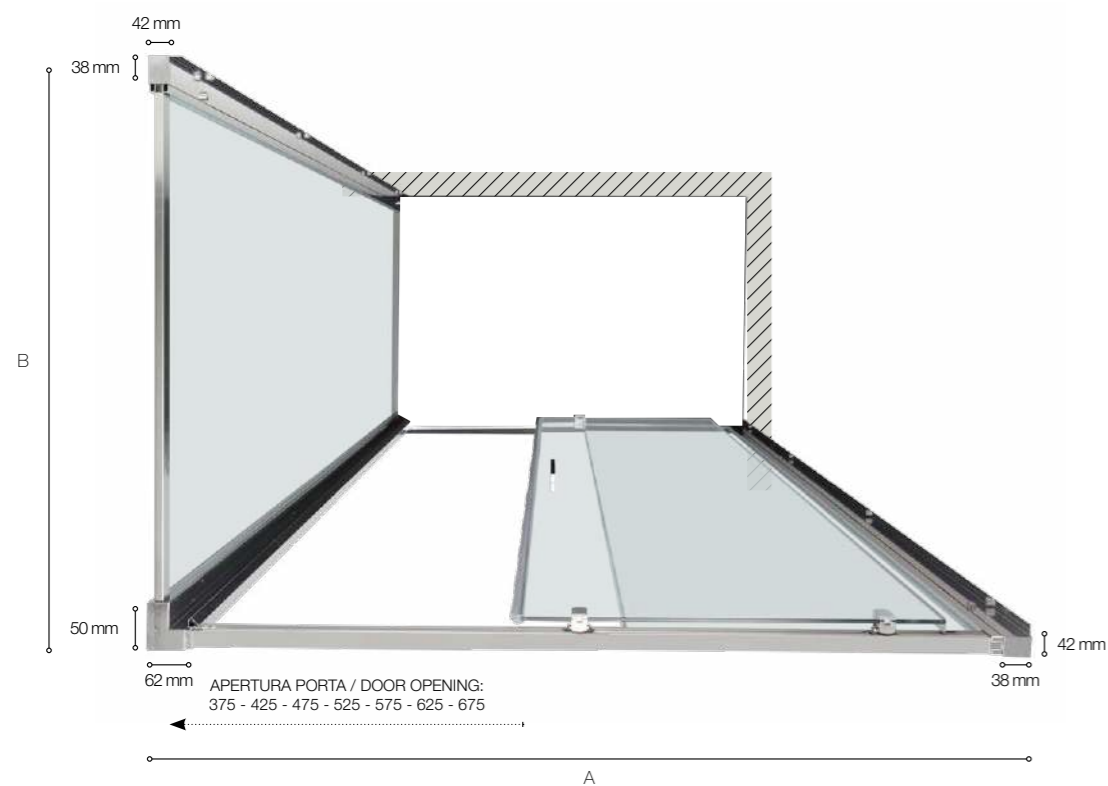


Versione Angolare DX
Right Corner Version

PORTA ABBINATA A LATO FISSO
DOOR MATCHED WITH FIXED PANEL

Specifiche tecniche / Technical specifications		
P/D	H/H	Estensibilità mm
mm	mm	Extension mm
1000	2000	962 - 1010
1100	2000	1062 - 1110
1200	2000	1162 - 1210
1300	2000	1262 - 1310
1400	2000	1362 - 1410
1500	2000	1462 - 1510
1600	2000	1562 - 1610
1700	2000	1662 - 1710
1800	2000	1762 - 1810

DIMENSIONI LATO FISSO (B)
FIXED SIDE PANEL SIZE (B)

Specifiche tecniche / Technical specifications			
P/D	H/H	Peso vetro kg	Estensibilità mm
mm	mm	Glass weight kgs	Extension mm
650	2000	22	615 - 665
700	2000	24	665 - 715
800	2000	27	765 - 815
900	2000	30	865 - 915
1000	2000	34	965 - 1015

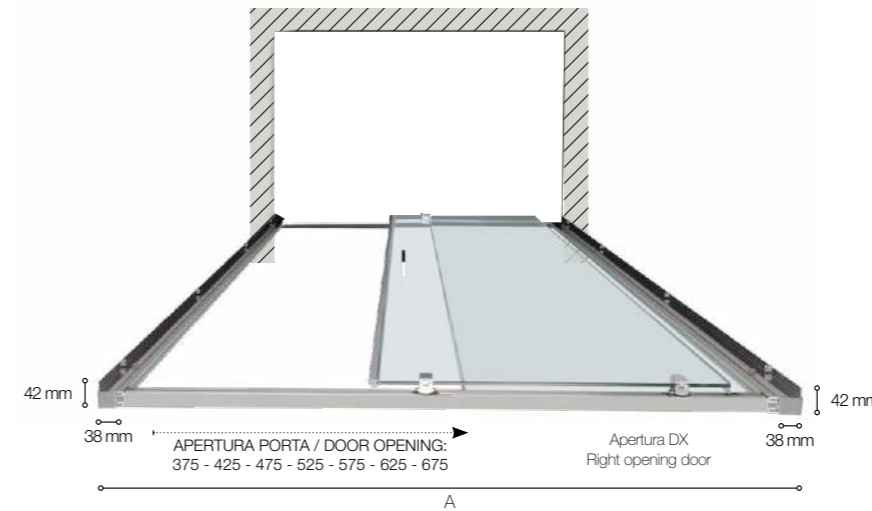


Versione nicchia
Niche version

DIMENSIONI PORTA (A) (NICCHIA)
DOOR SIZES (A) (NICHE)

Specifiche tecniche / Technical specifications				
L/W	H/H	Peso vetro kg	Apertura porta	Estensibilità mm
mm	mm	Glass weight kgs	Door opening	Extension mm
1000	2000	34	375	950 - 1000
1100	2000	39	425	1050 - 1100
1200	2000	42	475	1150 - 1200
1300	2000	45	525	1250 - 1300
1400	2000	48	575	1350 - 1400

Specifiche tecniche / Technical specifications				
L/W	H/H	Peso vetro kg	Apertura porta	Estensibilità mm
mm	mm	Glass weight kgs	Door opening	Extension mm
1500	2000	51	625	1450 - 1500
1600	2000	54	675	1550 - 1600
1700	2000	57	675	1650 - 1700
1800	2000	59	675	1750 - 1800

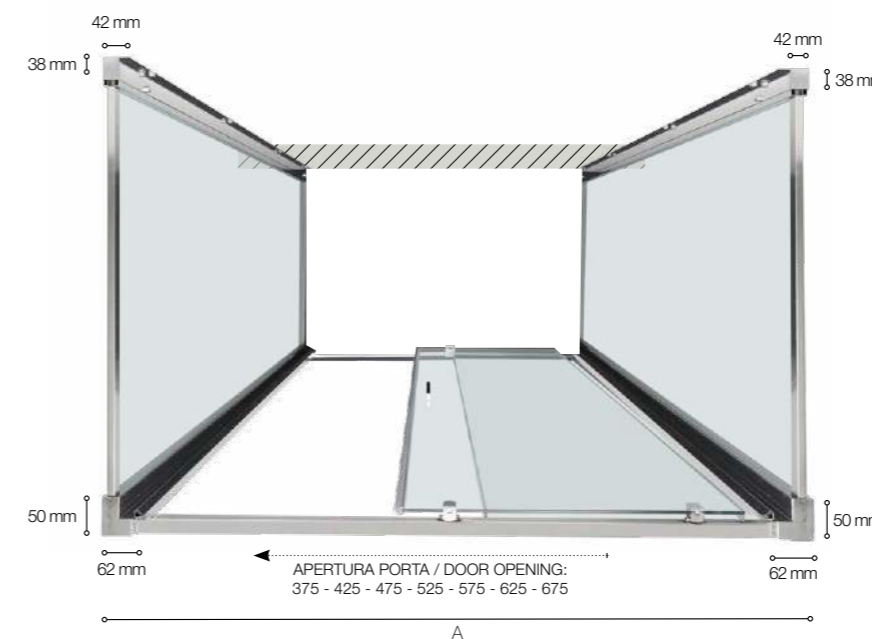

Versione Centro Parete
Center Wall Version

PORTA ABBINATA A 2 LATI FISSI
DOOR MATCHED WITH 2 FIXED PANELS

Specifiche tecniche / Technical specifications		
P/D	H/H	Estensibilità mm
mm	mm	Extension mm
1000	2000	974 - 1020
1100	2000	1074 - 1120
1200	2000	1174 - 1220
1300	2000	1274 - 1320
1400	2000	1374 - 1420
1500	2000	1474 - 1520
1600	2000	1574 - 1620
1700	2000	1674 - 1720
1800	2000	1774 - 1820

DIMENSIONI LATO FISSO (B)
FIXED SIDE PANEL SIZE (B)

Specifiche tecniche / Technical specifications			
P/D	H/H	Peso vetro kg	Estensibilità mm
mm	mm	Glass weight kgs	Extension mm
650	2000	22	615 - 665
700	2000	24	665 - 715
800	2000	27	765 - 815
900	2000	30	865 - 915
1000	2000	34	965 - 1015